Chap 16 Electric Potential, Energy, and Capacitance

Dr. Coman

CREDITS

- College Physics, Serway
- http://hyperphysics.phy-astr.gsu.edu
- The McGraw-Hill Companies.
- Physics with health science applications, Urone, John Wiley and Sons
- www.prenhall.com/esm_wilson_physics
- http://www.walter-fendt.de/ph11e
- http://www.lon-capa.org/~mmp/
- SERWAY COLLEGE PHYSICS 7E MEDIA LIBRARY

Objectives I

- Explain the concept of "field" and compare it to "action-at-a-distance" using forces.
- Explain and draw the electric field configuration due to various discrete and continuous charge distributions.
- Relate the theoretical interpretation of electric potential to everyday phenomena and use it to solve problems.
- Explain the meaning of electrostatic energy and apply it to solve problems involving capacitance.

Outline I

- Electric Potential Energy and Electric Potential Difference
- Equipotential Surfaces and the Electric Field
- Capacitance
- Dielectrics
- Capacitors in Series and in Parallel

Potential differences

- Are defined in terms of positive charges, as is the electric field.

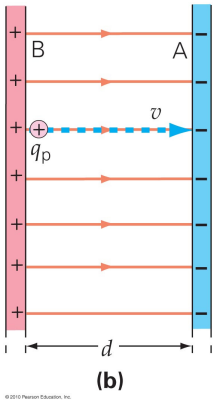

- we must account for the difference between positive and negative charges.
- Positive charges, when released, accelerate toward regions of lower electric potential.
- Negative charges, when released, accelerate toward regions of higher electric potential.
-

Electric Potential Energy and Electric Potential Difference

- It takes work to move a charge against an electric field.

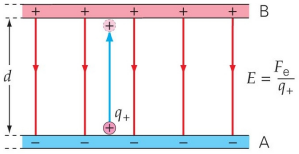

$$\Delta U_e = U_A - U_B = q_+ \cdot Ed$$

- Electric field is a measure of the change in electric potential over a distance.
  - Just as with gravity, this work increases the potential energy of the charge.
- It is convenient to define a quantity that is the electric potential energy per unit charge.

$$\Delta V = \frac{\Delta U_e}{q_+} \rightarrow \quad \text{expressed in } Volts$$

- This is called the electric potential.
-

Electric Potential Energy and Electric Potential Difference

- The potential difference between parallel plates can be calculated relatively easily:

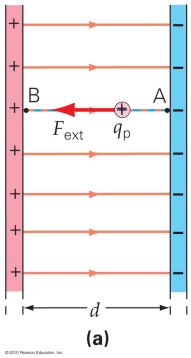

$$\Delta V = \frac{\Delta U_e}{q_+} = \frac{q_+ \cdot E \cdot d}{q_+} = E \cdot d$$

- For a pair of oppositely charged parallel plates, the positively charged plate is at a higher electric potential than the negatively charged one by an amount ΔV
- only changes in the electric potential can be defined.
- The choice of $V = 0$ is arbitrary.
-

Electric potential difference of a point charge

- Electric potential difference of a point charge:

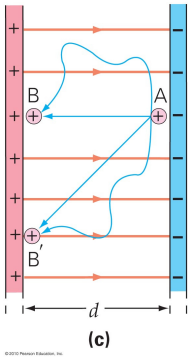

$$\Delta V = E \cdot d$$

$$E = \frac{F}{q}$$

$$F = kq_1 \frac{q_2}{d^2}$$

$$\Delta V = \frac{k \cdot q}{r_B} - \frac{k \cdot q}{r_A}$$

-

Electric potential energy of a system of two charges

- The electric potential energy of a system of two charges is the change in electric potential multiplied by the charge:

$$\Delta U_e = q_2 \cdot \Delta V = q_2 V_1 - V_\infty$$

$$\Delta U_e = q_2 \cdot \left(\frac{k \cdot q_1}{r_{12}} - 0 \right) = \frac{k \cdot q_1 \cdot q_2}{r_{12}}$$



-

Potential energy due to a system of charges

- The additional potential energy due to a third charge is the sum of its potential energies relative to the first two.



- Further charges extend the sum.
  $U_{total} = U_{12} + U_{13} + U_{23} + ...$
-

Equipotential Surfaces and the Electric Field

- An equipotential surface is one on which the electric potential does not vary;
  - it takes no work to move a charge along an equipotential surface.



- Equipotentials are always perpendicular to electric field lines.



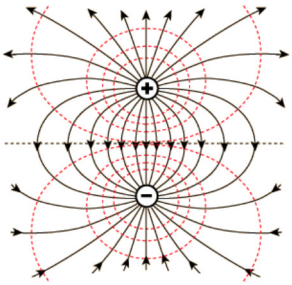

-

Equipotential Surfaces and the Electric Field

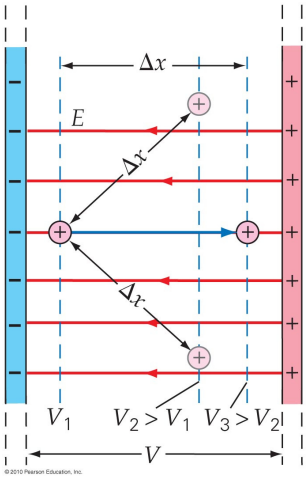

- The direction of the electric field E is that in which the electric potential decreases the most rapidly.
- Its magnitude is given by

$$E = \left(\frac{\Delta V}{\Delta x} \right)_{max}$$

-

Common voltages

-

TABLE 16.1 Common Electric Potential Differences (Voltages)

Source	Approximate Voltage (ΔV)
Across nerve membranes	100 mV
Small-appliance batteries	1.5 to 9.0 V
Automotive batteries	12 V
Household outlet (United States)	110 to 120 V
Household outlets (Europe)	220 to 240 V
Automotive ignitions (spark plug firing)	10 000 V
Laboratory generators	25 000 V
High-voltage electric power delivery lines	300 kV or more
Cloud-to-Earth surface during thunderstorm	100 MV or more

-

Capacitance

- A pair of parallel plates will store electric energy if charged oppositely;

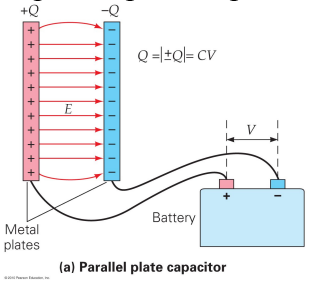

- this arrangement is called a capacitor.

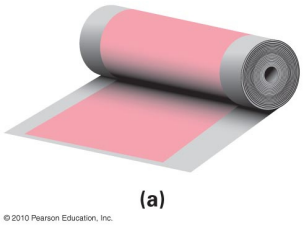

-

Capacitance of a capacitor

- The charge is related to the potential difference; the ratio is called the capacitance.
  $Q = CV \rightarrow$

  $C = \dfrac{Q}{V}$ expressed in Farrad.

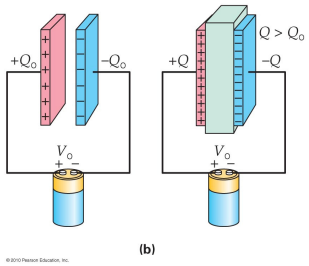

-

Capacitance of a parallel-plate capacitor

$$C = \frac{Q}{V}$$

$$C = \frac{Q}{V} = \varepsilon_0 \cdot \frac{A}{d}$$

- 

(b) Schematic diagram

- ε_0 is the permitivity of free space:

$$\varepsilon_0 = \frac{1}{4\pi k} = 8.85 \cdot 10^{-12} \frac{C^2}{N \cdot m^2}$$

The energy stored in a capacitor

- The energy stored in a capacitor is the energy required to charge it:

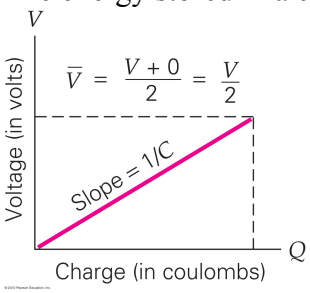

$$U_C = \frac{1}{2}QV = \frac{Q^2}{2C} = \frac{1}{2}CV^2$$

Dielectrics

- Dielectric: another word for insulator.

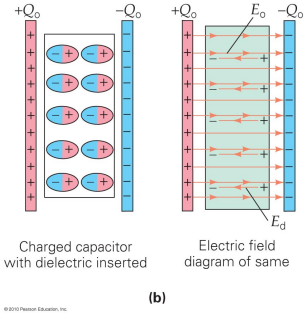

- A dielectric inside a capacitor increases the capacitor's energy storage by an amount characterized by the dielectric constant, k.

$$C = \frac{Q}{V} = \frac{Q_0}{\frac{V_0}{k}} \rightarrow$$

$$C = k\left(\frac{Q_0}{V_0}\right) \rightarrow$$

$$C = kC_0$$

-

Capacitors in Series

- Capacitors in series all have the same charge;

$$\frac{1}{C_s} = \frac{1}{C_1} + \frac{1}{C_2} + \frac{1}{C_3} \ldots$$

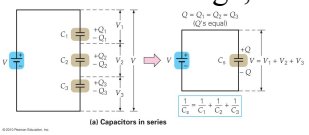

- the total potential difference is the sum of the potentials across each capacitor.
  - this gives the inverse of the capacitance.
-
-

Capacitors connected in Parallel

- Capacitors in parallel all have the same potential difference;

$$C_p = C_1 + C_2 + C_3 + \ldots$$

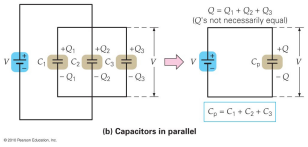

- the total charge is the sum of the charge on each.
- We can picture capacitors in parallel as forming one capacitor with a larger area:



-
-

Summary I

- Electric potential difference between two points is the work done per unit charge in moving a charge between those two points.
- Equipotential surfaces are surfaces on which the electric potential is constant.
- Electric potential for a point charge:

$$V = \frac{kq}{r}$$

- Electric potential energy for a pair of point charges:

$$U_{12} = \frac{kq_1q_2}{r_{12}}$$

-

Summary II

- Electric potential energy for an array of point charges:
  $U_{total} = U_{12} + U_{13} + U_{23} + \ldots$
- The electric field is in the direction of maximum change of the electron potential. Its Magnitude:

$$E = \left(\frac{\Delta V}{\Delta x}\right)_{max}$$

- A capacitor consists of two metallic plates; capacitors store electric energy. Capacitance:

$$C = \frac{Q}{V}$$

-

Sample Problem

- $K = \Delta U = q \Delta V = \left(1.60 \cdot 10^{-19} C\right) \cdot \left(10^{6} V\right)$
-
-
-

Classroom TASK

- $Q = CV \rightarrow$ doubling V ...
-
-
-

Sample Problem

- $d \rightarrow d_2 = 3d,$ then

  $C \rightarrow C_2 = \varepsilon_0 \cdot \frac{A}{d'}$

  $C_2 = \varepsilon_0 \cdot \frac{A}{3 \cdot d} = \frac{C}{3}$

  $Q = \frac{C}{V}$ since V is constant $\rightarrow$

  $Q = \frac{Q_2}{3}$

-

Sample Problem

- $W_{elec} = -U_t = -k\frac{q_1 \cdot q_2}{r} = \frac{k \cdot q^2}{r} \rightarrow$

  $q = \sqrt{\frac{W \cdot r}{k}}$

Sample Problem

- $E = \frac{\Delta V}{\Delta x} \rightarrow \Delta x$

Sample Problem

- For a point charge q, the potential is

  $V = k\frac{q}{r}, V = \frac{kq}{r} \rightarrow q$

  q is positive because the potential is positive relative to infinity